

Forcom Technology Co., Ltd.

FORCOM

Tel: +886-2-77296880 Fax: +8862-27055495

e-mail: info@forcomtech.com.tw

URL: <http://www.forcomtech.com.tw>



USB to RS232 x 4 converter

Model No.: UTRS104

Industrial specification

FTDI CHIP

USB to serial converters from Single chip USB to RS232

USB 2.0 Full Speed ,USB 1.0/1.1 compliant

480 Mbps USB data rate

Transmit and receive LED drive .

Serial Interface 4 Port

15 KV ESD protection for all serial ports

Connector: DB9 Male and MINI USB B type

Cable:USB Type A and MINI USB B Type

.Driver Support

Windows 2000

Windows XP and XP 64-bit

Windows Vista and Vista 64-bit

Windows Server 2003 and 2003 64-bit

Windows Server 2008 and 2008 64-bit

Windows 7 and 7 64-bit

Mac OS-X

Linux 2.4 and greater

Applications

- .Notebooks and Industrial PCs peripherals devices
- .Terminal Adapters and POS terminals
- .Peripherals interface
- .General-purpose RS-232 data link

Serial Converter

Mode	Asynchronous serial communication
Speed	Up to 921.6kbps
Connector	DB9 Male*4
Signals	TXD,RXD,RTS,CTS,DTR,DSR,DCD ,RI ,GND
Protection	15KV ESD Protection for all signals
Data Bits	7,8
Stop Bits	1,2
Flow Control	RTS/CTS, X-On/X-Off
Parity	None,Even,Odd,Space,Mark
IRQ/IO Address	Assigned by BIOS
FIFO	TX Buffer 2k bytes, RX Buffer 2k bytes per channel

Software

Driver Support	Windows 98, 98SE, ME, 2000, Server 2003, XP ,Server 2008, XP 64-bit Windows Vista, Vista 64-bit, Server 2008 R2,Windows 7,Windows 7 X64 Mac OS-X Linux 2.4 and greater
----------------	---

Hardware

Power Input	MINI USB B type connector
Power Consumption	165mA max
LED	TXD1,RXD1,TXD2,RXD2,TXD3,RXD3,TXD4,RXD4
Dimensions	63.5(W)x22.5(H)80.5(D)mm
Weight	85g

Connector DB9 Male 9PIN Define

NO	DM9 Male
1	DCD

2	RXD
3	TXD
4	DTR
5	GND
6	DSR
7	RTS
8	CTS
9	RI


Environmental

Operating Temp	-30~75°C
Storage Temp	-40~85°C
Humidity	5~95% Non-Condensing
Case	PC

Approvals

CE ,FCC RoHs Compliant

Dimension

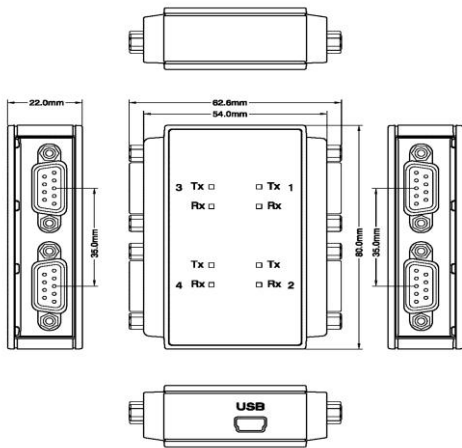

DIN rail Dimension

